

Courtesy of: DiscountCarStereo.com  
Serving the internet community since 1995



## **AUXILIARY & IPOD ADAPTER INSTALLATION GUIDE FOR PORSCHE CDR30/31 RADIOS**

Revised December 7, 2020



## Test Operation

1. Connect audio device to 3.5mm plug
2. Press **CD/AUX** button on radio repeatedly until "AUX Mode" is displayed.  
Alternately: To switch from CD to AUX press "AUX" soft key
3. From audio device select test track and playback should now be heard on car speakers.
4. Use radio volume control to set playback level



Playlist and Track selection is **\*NOT\*** possible from the CDR-3D radio. You must use the Apple built-in controls to access music files.

5. If correct operation is confirmed, tuck away any extra wire, re-install Radio.

## Installation 2: Applies to iP-CDR3D


Remove CDR3D/31 radio from dashboard to gain access to the connectors. Radio removal not covered in these instructions but available [here](#) or [here](#).

1. Disconnect factory Quadlock plug from radio by pressing release tab and pull away (plug slides out as you pull) (See **Fig. 1**)
2. Disconnect **green** and **blue** sub-plugs from main Quadlock (See **Fig. 1**)



CDR3D/31 radios with factory AUX and Bluetooth has a blue and green 12-pin sub-plug. The AUX (**Green**) sub-plug must be disconnected and remain disconnected and replaced by **black** 12-pin sub-plug included on adapter.

3. If present, transfer **blue** 12-pin sub-plug (from step 3) to Quadlock connector on adapter harness (To radio in **Fig. 4**)  
Note: The connectors/plugs are "keyed" so to fit only in matching slot.

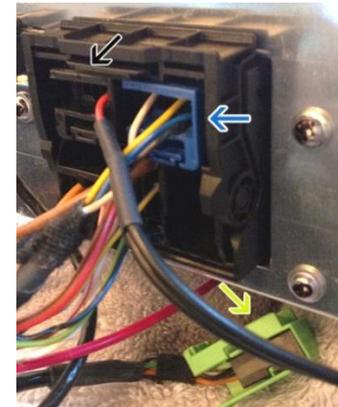

**Fig. 3**

**Green sub-plug remains disconnected** (See **Fig. 3**)

4. Connect factory Quadlock plug (from step 2) to Quadlock connector on adapter harness (To Car in **Fig. 4**)



**Fig. 4**

Quadlock plug/connector on adapter harness

5. Ensure all connections are snug
6. Carefully route 30-pin dock plug (See **Fig. 5**) to glove box, center dash or location where Apple device will reside (within 4.5 ft.)



**Fig. 5**

30-pin dock plug

## Test Operation

1. Connect 30-pin Apple device to dock plug
2. Apple device should begin charging
3. Press **CD/AUX** button on radio repeatedly until "AUX Mode" is displayed. Alternately: To switch from CD to AUX press "AUX" soft key
4. From the Apple device select test track.
5. Use radio volume control to set playback level

**Warning!** Playlist and Track selection is **\*NOT\*** possible from the CDR-30 radio. You must use the Apple device built-in controls to access music files.

6. If correct operation is confirmed, tuck away any extra wire, re-install radio.

### Disclaimer

- This product has no affiliation with Porsche or Apple
- There are no warranties expressed or implied by purchase of this product
- We're not liable for misuse of this product.
- Aux mode must be enabled otherwise visit nearest Porsche dealer
- We recommend professional installation.

© 1995-Dec-20 Discount Car Stereo. All rights reserved. Information in this document is subject to change without notice. Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.