
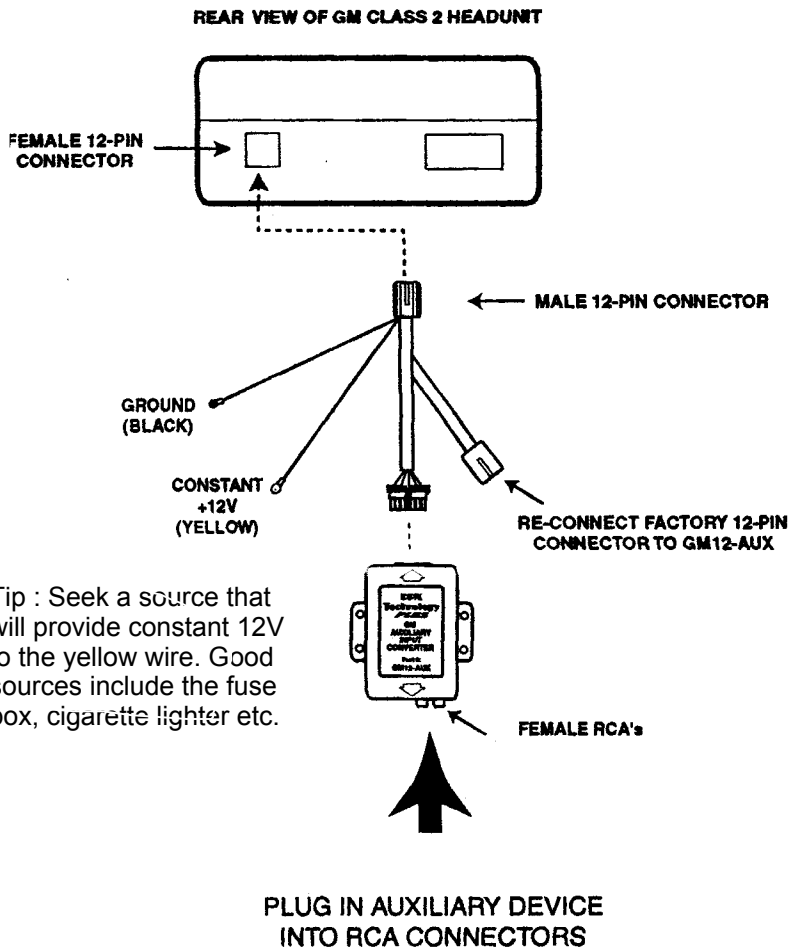


INSTALLATION DIAGRAM FOR GM12-AUXv2 GM AUXILIARY INPUT ADAPTER

LOCATION OF INTERNAL JUMPER



JUMPER SETTING:

- For radios with "BAND" button, jumper must be in "XM" position.
(Uses "BAND" button to access AUX 1 or 2)
NOTE: Same audio source will play regardless of AUX 1 or 2.
- For radios without "BAND" button, jumper must be in "CHANGER" position.
(Uses "CD/AUX" button to access changer mode or Aux-input)

TO TOGGLE BETWEEN GM12-AUX AND FACTORY DEVICE:

If a factory XM tuner is being used in conjunction with the GM12-AUX, you can toggle between the "AUX" and factory XM by pressing track up once then track down once (while radio is in XM mode).

If a factory CD-changer is being used in conjunction with the GM12-AUX, you can toggle between the "AUX" and factory CD-changer by pressing TRACK UP twice then TRACK DOWN twice (while radio is in CD-changer mode).

NOTE: CD-changer will continue to play.