

INSTALLATION INSTRUCTIONS FOR THE GM9-AUX

The GM9-AUX will convert the 9-pin data port of any GM radio with CD changer controls to an auxiliary input.

NOTE: For proper operation of the GM9-AUX, the factory CD changer, if present, will need to be disconnected from the factory harness.

- Not compatible with vehicles equipped with the 6-disc in-dash slave unit.
- Radios from 2000 and before are not capable of controlling two units. Therefore, these vehicles will need to have the slave unit disconnected.
- Compatible with Pioneer Universal XM Satellite Digital Tuner System (GEX-FM903XM), when used with Part# CD-RB10.
- Compatible with Sony Universal XM Satellite Digital Tuner System (DRN-XM01R, DRN-XM01C), when used with Part# RCA6MM.

CAUTION: Before any connections are made, Discount Car Stereo.com strongly recommends that all circuits be verified with a voltmeter before interfacing with them. We also recommend that this Protocol Converter be installed by a Certified Car Audio Installation Technician. Always set the parking brake before working on any vehicle.

DO NOT force connectors together as pin damage may occur. This installation will be flawless if you take your time making the connections described below. Following the installation sequence below is critical to ensure proper recognition of the CD changer by the factory radio.


INSTALLATION:

1. Disconnect the negative battery terminal.
2. Remove the factory radio to gain access to the connectors on back of radio.
3. Remove any connector that may be plugged into the 9-pin DATA port.
4. Plug the 9-Pin connector of the GM9-AUX into the mating socket on the back of the radio.
5. Plug the factory 9-pin DATA cable into the mating socket on the GM9-AUX. Factory CD changer, if present, will need to be disconnected from the harness.
6. Connect appropriate length patch cord (not included) between the GM9-AUX and auxiliary device.
7. Reinstall the factory radio.
8. Reconnect the negative battery terminal.

VERIFY OPERATION:

1. With radio on, activate auxiliary device.
2. Push the "TAPE/AUX" TAPE/PLAY" button on radio to gain access to auxiliary audio input.
3. Display on radio will show CD 1 TRACK 1, and audio of auxiliary device will be heard.
4. Adjust volume levels of auxiliary device. (If applicable)

INSTALLATION DIAGRAM PIE PART # GM9-AUX

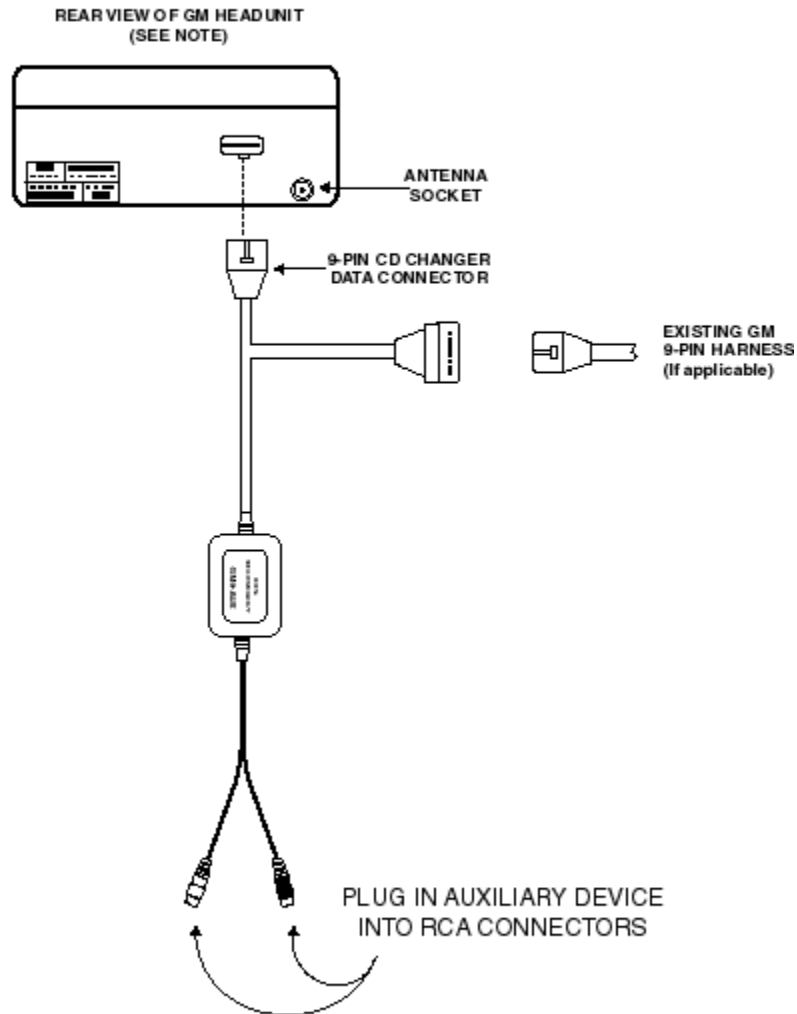

NOTE: RADIO STYLES MAY VARY BY VEHICLE MODEL. ALWAYS USE THE 9-PIN CONNECTOR DATA PORT WITH THE FOLLOWING EXCEPTION: THE 9-PIN DATA PORT ON THE AM/FM/SINGLE CD HEADUNITS IS USED TO ADD AN OEM CASSETTE DECK AND IS NOT INTENDED FOR USE WITH A CD CHANGER.

By: DiscountCarStereo.com

© 1995-04 Discount Car Stereo, Inc. All rights reserved. Information in this document are subject to change without notice. Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.