

HONDA XM5-HON98 APPLICATION & INSTALLATION MANUAL

About the XM5-HON98

The XM5-HON98 will allow direct audio input of the XM MyFi, Rody XT, Tao, Pioneer Airwave and Audiovox Express through the CD changer port in select 1998-2005 Honda OEM radio for optimum sound quality. The built-in 5-volt power supply of the XM5-HON98 powers the XM unit directly, eliminating the need to use the external cigarette lighter adapter.

The XM5 protocol converters consist of a vehicle specific harness that connects to the OEM radio directly or via a pre-wired data cable. A small 2.5" X 3.5" converter box houses a 5-Volt DC jack and a 3.5mm audio jack. Any of the above mentioned XM receivers may then be connected into the DC and audio jacks utilizing the included DC power and 3.5mm to 3.5mm audio cable(s). The XM5 protocol converter will power the XM receiver and charge battery (where applicable) when the vehicle is running or the key is in ignition position. The XM receiver will automatically turn off when the vehicle is turned off.

VEHICLE APPLICATIONS

For the following vehicles with CD Changer controller headunits:

1998-02 Accord
 1999-05 Civic Compatibility includes Si and Hybrid Models.
 1999-04 CRV
 1999-04 Odyssey
 2003-05 Pilot
 1999-01 Prelude
 2000-03 S2000

Note: Not compatible with models equipped with 6-disc in-dash or Navigation radios.

INSTALLATION

Some Honda radios are code protected. Verify that the code is available before disconnecting the battery.


1. Disconnect the negative battery terminal.
2. Remove the Honda radio to gain access to the connectors on the back of the radio (14-pin connector).
3. Plug the 14-pin connector of the XM5-HON98 to the 14-pin connector on the radio.
NOTE: Vehicles that have the factory CD changer will need to have the changer disconnected from the vehicle harness in order to connect the XM5-HON98.
4. Determine the mounting location for the XM unit and mount as per the manufacturer's instructions.
5. Connect the supplied 3.5mm male to male cable between the XM unit and the XM5-HON98
6. Connect the supplied 5-Volt power cable between the XM unit and the XM5-HON98.
7. Reinstall factory radio
8. Reconnect the negative battery terminal

VERIFY OPERATION


1. With radio on, press the CD button to access the CD changer function
2. Display on radio will show CD1 TRACK 1 and audio from the XM unit will be heard
3. Operate the XM unit as specified by manufacturer [*Honda radio will not control the XM device*]
4. Turn off ignition and verify that the XM unit turns off.

INSTALLATION DIAGRAM

FOR APPLICATION WITHOUT OEM CASSETTE PLAYER

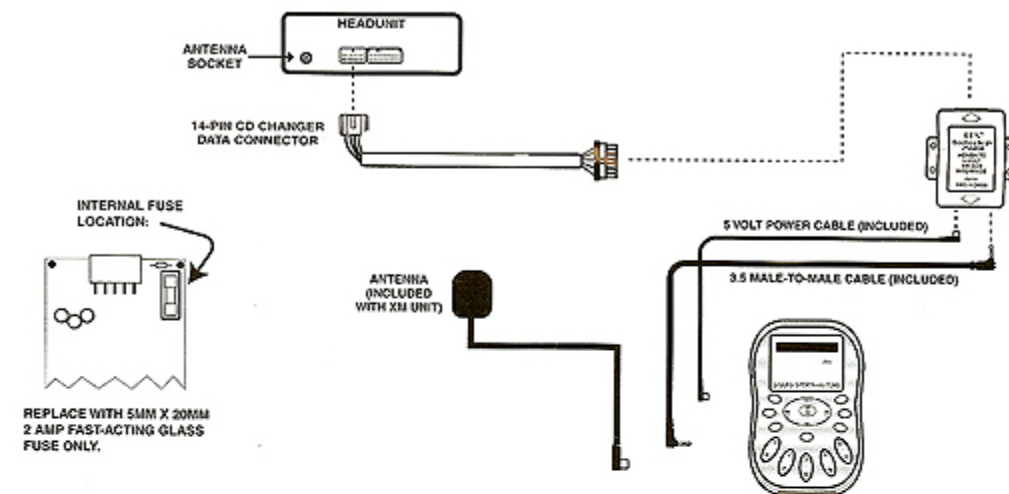

FOR APPLICATION WITH OEM CASSETTE PLAYER

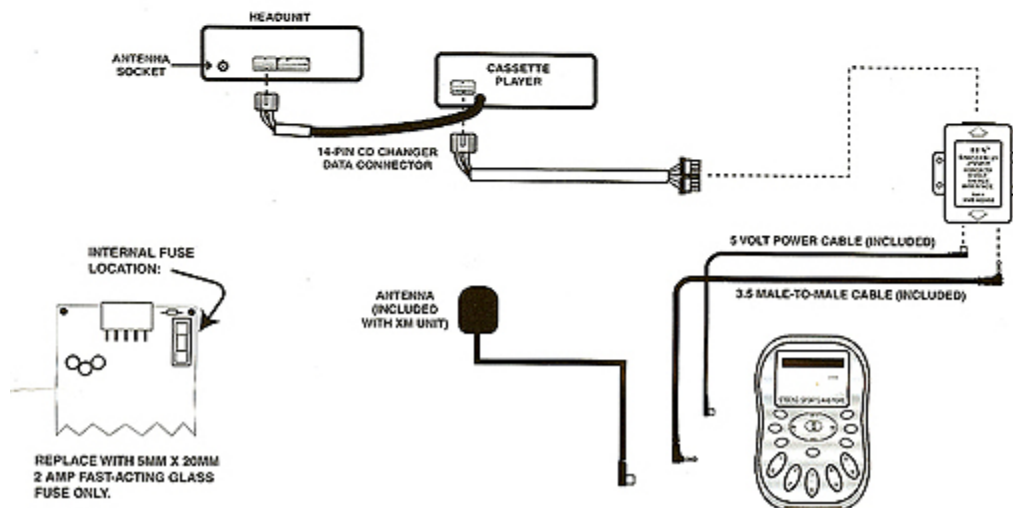

Revised 11/27/05

©1995-05 Discount Car Stereo Inc. All rights reserved. Information in this document is subject to change without notice.
Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.