

Courtesy of: DiscountCarStereo.com  
Serving the internet community since 1995



# A2D-GM32

## MUSIC STREAMING INSTALL GUIDE FOR SELECT 1995-05 BUICK, CADILLAC & OLDSMOBILE 32-PIN RADIOS WITH SOURCE BUTTON

Created October 10, 2016  
Revised February 19, 2024

## PRODUCT SAFETY & DISCLAIMER

READ ALL INSTRUCTIONS CAREFULLY BEFORE INSTALLING, FAILURE TO DO SO MAY CAUSE PERSONAL INJURY OR DAMAGE TO PRODUCT AND/OR PROPERTY

- This installation guide is provided as a GENERAL installation guide, some vehicles vary and may require additional steps. We do not accept responsibility for third party labor charges or modifications. Exercise due-diligence when installing this product.
- We do not accept any responsibility for vehicle damage or personal injury resulting from the installation of this product.
- Careless installation and operation can result in equipment damage

## REQUIREMENT

1995-05 BUICK, CADILLAC & OLDSMOBILE RADIOS WITH SOURCE BUTTON

## Introduction

If you drive an older GM car, truck or Van that still has the original radio and looking for the ability to stream from smartphone etc.; the A2D-GM32 is for you! The A2D-GM32 streaming module works on select 1995-04 GM radios with "SOURCE" button and 32-pin connector and replaces separate/ remote CD changer (if present). A wireless connection means no wires, clutter or complicated setup. All the user has to do is connect module to radio 32-pin port, pair smartphone, tablet etc. and enjoy tons of applications including Pandora, Apple music and more on the car system.

**Optional smart remote:** Allow users to control select smartphone functions while keeping eyes on the road. (See remote control details on page 3)

See **Frequently Asked question** at the end of this guide for details.



Works only on 1995-04 radios with "SOURCE" button on faceplate and 32-pin (BLUE) socket on the rear. **Not applicable to radios with 32-pin (white) socket nor radios with "TAPE/AUX" or "CD/AUX" button on faceplate.**


## Installation

1. Remove factory radio from dash (Vehicle specific radio removal procedures are not part of this guide but may available upon [request](#))
2. Disconnect factory 32-pin plug (See **Fig. 1**) from radio (See **Fig. 2**)
3. Connect install harness 32-pin plug (See **Fig. 1**) to radio 32-pin port vacated in step 2

**Note:** If vehicle has a CD changer, it must be disconnected at the CD changer plug in remote location. To retain CD changer, purchase our [BLU-GM2](#) instead.



**Fig. 1**  
32-pin plug

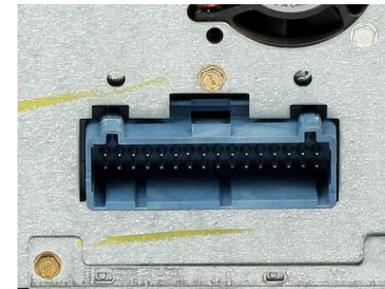

**Fig. 2**  
Radio 32-pin port

4. Connect factory 32-pin plug (See **Fig. 1**) to module harness 32-pin socket (See **Fig. 3**)




Fig. 3

5. Secure module and proceed to next step

## Pairing

Pairing process varies among devices but the basic steps are the same. This process is done upon initial install and may not have to be repeated.

1. Turn Ignition and radio "ON"
2. On A2DP device: Go to **Settings, Wireless & Networks, Bluetooth Settings**
3. Enable **Bluetooth**
4. In Bluetooth settings tap **Scan (Search) for devices**.
5. Wait for Bluetooth name to appear (See below) and select it. *(Bluetooth name displayed is based on option selected at checkout).*

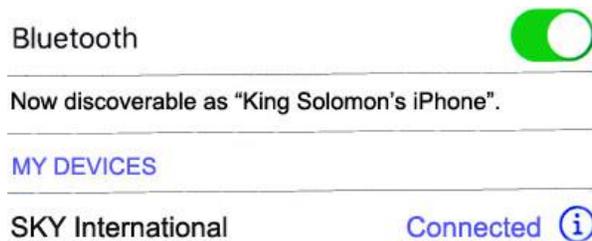


## Optional Smart remote

### Smart Remote:

The C5 radio buttons do NOT operate your device, so instead of fumbling around, simply pair this remote and control select phone functions from the remote while also keeping eyes on the road. Optional smart remote allows users to:

1. Control music wirelessly
2. Track up/down
3. Play/Pause (Android)
4. Volume up/down

### Pairing Bluetooth remote:

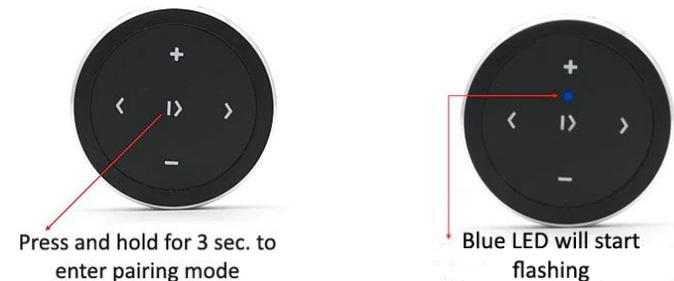

## Operation

1. Turn radio "ON" and verify "CHNGR" is illuminated
2. Press and release "SOURCE" button. Display changes to "Track 1, DISC 6" (CD changer mode) or as seen in Fig.5



Fig. 4



Fig. 5

3. While radio is in "CD changer" mode (Fig. 5); immediately press and release Preset4 then Preset 5 in quick succession. See Fig.4.  
If successful, radio remains in "CD changer" mode (Fig. 5) and after a short time default to TIME display screen.
4. Failure to complete steps 2 & 3 in a timely manner may result in E33 error in which case steps 2-3 must be repeated.
5. Launch smartphone or tablet streaming application.
6. Ensure smartphone volume is set to 80% or higher and use radio volume button to set playback level.

**Warning!** Playlist and Track selection is \*NOT\* possible from the GM radio. You must use the audio devices built-in controls to access audio files.

## Comparison features:

We offer a few cables and adapters but if unsure which one to buy, the following table is intended to break down each product feature which we hope helps in your decision. These adapters/cables work only if equipped with original Theftlock radio and some may also require separate/slave single CD, Cassette or CD changer.

Feature	AUX-GMI	DCS-GMI	AZD-GMI	BLU-GMI	AZD-GM32
Retains remote/slave unit*	✓	X	✓	X	X
Auxiliary input (3.5mm plug)	✓	✓	X	X	X
Requires remote/slave unit*	✓	X	✓	X	X
Music streaming	X	X	✓	✓	✓
Supports Hands-Free calls	X**	X**	X	X	X
Wireless connection	X	X	✓	✓	✓
Connects behind radio	✓	✓	✓	✓	✓
Plug-n-play installation	✓	✓	✓	✓	✓

\*Separate/Slave units (single CD, TAPE or CD changer) are installed in lower dash or below climate controls. Main AM/FM radios are installed in upper dash.

\*\* Speakerphone is possible if audio device supports it and by which caller's voice is heard on car speaker

## Frequently asked questions

- 1. My radio has a white 32-pin connector. Will the A2D-GM32 work on these 32-pin radios?**  
**NO.** The A2D-GM32 works on radios with 32-pin connector (BLUE) and "SOURCE" button on faceplate.
- 2. Does the A2D-GM32 support hands-free calls?**  
**NO;** The A2D-GM33 supports music streaming only. Calls received during streaming session must be answered using handset or as customary.
- 3. My vehicle has a CD changer. Do you offer a solution by which I can keep the changer and stream from my phone?**  
**NO;** but our [BLU-GM2](#) supports music streaming and CD changer retention. Changer must be fully functional.(able to play CD's)
- 4. When I decide to remove the A2D-GM32, will I have wiring issues?**  
**NO;** the A2D-GM32 plug-n-play solution does not interfere with factory wiring integrity. In fact, disconnecting the A2D-GM32, the system will continue to function as before.
- 5. How is sound quality?**  
Sound quality is very good without static or interference provided vehicles electrical system is up to standard.
- 6. Do you recommend changing car speakers in order to get better sound?**  
**YES.** The original speakers are made of paper cone and foam surround that deteriorate over time. Replacing with newer rubber surround speakers will improve sound from all sources and highly recommended.
- 7. My radio will not enter CD changer mode as seen in Fig.5 what do you suggest?**  
Placing radio in **CD changer** mode is as easy as 1.2.3.
  1. Press and release "Source" button (display should read Track 1, Disc 6)
  2. Press and release **Preset 4** and immediately
  3. Press and release **Preset 5.**
- 8. Do I have to follow steps in question 7 each time I want to stream?**  
**YES.** These are the 3 steps required to place radio in "CD changer" mode.  
**Note:** Pressing any radio function button (e.g. presets, scan, seek, tune, recall) cancels CD changer mode.

### Disclaimer

- This product has no affiliation with GM
- We're not liable for misuse of this product.
- We recommend professional installation.

Email [support@discountcarstereo.com](mailto:support@discountcarstereo.com)

© 1995-Feb-24 Discount Car Stereo, Inc. All rights reserved. Information in this document is subject to change without notice. Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.