



AUX-JAG97

QUICK AUXILIARY INSTALLATION GUIDE FOR PRE-1998 JAGUAR RADIOS WITH CD CHANGER CONTROLS

Created February 6, 2017
Revised: September 13, 2021

PRODUCT SAFETY & DISCLAIMER

READ ALL INSTRUCTIONS CAREFULLY BEFORE INSTALLING, FAILURE TO DO SO MAY CAUSE PERSONAL INJURY OR DAMAGE TO PRODUCT AND/OR PROPERTY

- This installation guide is provided as a GENERAL installation guide, some vehicles vary and may require additional steps. We do not accept responsibility for third party labor charges or modifications. Exercise due-diligence when installing this product.
- We do not accept any responsibility for vehicle damage or personal injury resulting from the installation of this product.
- Careless installation and operation can result in equipment damage.

Requirements

OEM RADIO WITH CD BUTTON ON FACEPLATE AND 8 PIN PORT AT THE REAR

Introduction

Many owners with older Jaguar vehicles eager to find a way to connect and play their portable audio devices will be pleased to find this adapter. The AUX-JAG97 provides an audio input jack to which they connect and play Smartphone, MP3, iPods, Tablet etc. This adapter connects directly to the "CD" port at the radio or pre-wired cable in trunk/hatch/boot and replaces the CD changer (if present). Users who wish to retain CD playback may wish to consider our [A2D-JAG97](#) music streaming adapter with CD changer retention. The AUX-JAG97 works on all pre-1998 radios with "CD" button on faceplate and 8-pin port at the rear.

See **Frequently Asked question** at the end of this guide for more details.

Installation 1 (To radio)

Warning: This adapter connects to radio CD input or CD plug in trunk/hatch. CD changer (if present) must be disconnected

1. Remove radio from dash to gain access to connector. To remove radio, click [here](#) or below link for video removal guide which will aid through this step:
<https://www.youtube.com/watch?v=vpAldr6V3iE>
2. Locate "CD" port on radio (See **Fig. 1**) and if present, disconnect CD changer cable.

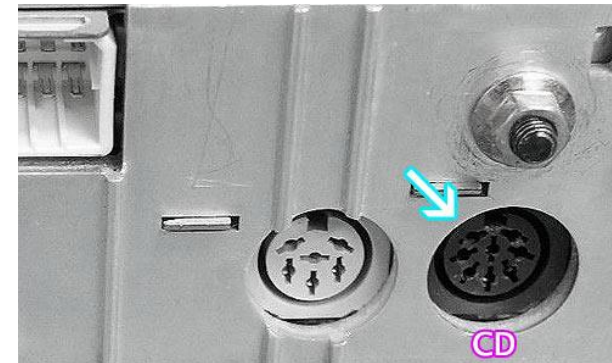


Fig. 1
Radio CD port

3. Connect adapter's 8-pin plug (See **Fig. 2**) to radio "CD" port. (See **Fig. 1**)



Fig. 2
8-pin plug

4. Connect supplied 3.5mm audio cable (See **Fig.3**) to adapter input jack (See **Fig. 4**).
5. Route to dash or wherever audio device will reside (Within 3 ft).
Optional [3.5-DF](#) dash mount adapter cable is available (See **Fig. 5**)



Fig. 3
3/16ft. Audio cable



Fig. 4



Fig. 4
optional Dash mount cable

6. Proceed to "Operation" on page 4.

Installation 2 (to CD cable in trunk/hatch)

Warning: For this installation option, vehicle must be wired for CD player in trunk/hatch. CD changer (if present) must be disconnected.

1. Locate 8-pin CD cable connector in trunk or hatch (CD changer, if present must be disconnected)
2. Connect adapters 8-pin plug (See **Fig.2**) to CD cable 8-pin connector
3. Connect supplied 3.5mm male-male cable to adapter input jack (See **Fig. 3**)
4. Route audio cable male plug to dash area or where audio device resides (within 5 meters/16ft.)
5. Proceed to "Operations" on page 4.

Operation

1. Turn ignition and radio "ON".
2. Press "CD" button on radio.
3. Connect audio plug to your audio device.
4. Place audio device in playback mode
5. Adjust volume on radio. If distorted, lower the volume on audio device or if inaudible, raise volume on audio device.

Warning: Playlist and Track selection is *NOT* possible from radio. Use the smartphone built-in controls to access and control the audio files.

5. If correct operation is confirmed, tuck away any extra wires and re-install Radio.

Frequent asked questions & troubleshooting

1. **Does the AUX-JAG97 work in Premium Systems?**
YES; the AUX-JAG97 works in all pre- 1998 Jaguar audio systems with CD controlling radios (CD button on faceplate). If stereo does not have CD controls, this adapter will not work. Please check prior to ordering.
2. **Your AUX-JAG97 and AUX-JAG98 list 1997 XK, how can I tell which one I need or what's the difference?**
Jaguar XK8 audio system changed in late 1997 which means vehicles produced in same calendar year will have different audio systems. To avoid costly returns, we highly recommend checking the "CD" plug in all 1997 XK8:
 - a. If Ai-NET connector- (See **Fig. 5**), purchase our AUX-JAG98
 - b. If 8-pin DIN (male plug)- (See **Fig. 5**), purchase our AUX-JAG97When in doubt check your application prior to ordering.



Fig. 5

3. **Can I connect the AUX-JAG97 directly to radio?**
YES; Even if vehicle is wired to trunk/luggage compartment, it is also possible to connect this adapter at the radio. See installation I on page 2. CD changer (if present) must be disconnected.
4. **My vehicle has a changer. Can I install the AUX-JAG97 and retain use of the changer?**

NO. The AUX-JAG97 takes the place of the CD changer. If vehicle has a CD changer you wish to retain, purchase our [A2D-JAG97](#) instead.

5. **Can I control music from radio buttons?**

NO; you must use audio device built-in controls to access music files. Radio volume control button is used to set playback level.

Disclaimer

- This product has no affiliation with Jaguar
- We're not liable for misuse of this product.
- We recommend professional installation

For additional support email support@discountcarstereo.com

© 1995-Sep-21 Discount Car Stereo, Inc. All rights reserved. Information in this document is subject to change without notice. Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.