



 **Bluetooth 4.2**



BTH-JAG98

QUICK START BLUETOOTH INSTALL GUIDE FOR 1997-06 XK (X100) AND 1998-03 XJ (X308) WITH CD CHANGER

(Not applicable to other model/years)

PRODUCT SAFETY & DISCLAIMER

READ ALL INSTRUCTIONS CAREFULLY BEFORE INSTALLING, FAILURE TO DO SO MAY CAUSE PERSONAL INJURY OR DAMAGE TO PRODUCT AND/OR PROPERTY

- This installation guide is provided as a GENERAL installation guide, some vehicles vary and may require additional steps. We do not accept responsibility for third party labor charges or modifications. Exercise due-diligence when installing this product.
- We do not accept any responsibility for vehicle damage or personal injury resulting from the installation of this product.
- Careless installation and operation can result in equipment damage.

Requirement

Fully functioning CD auto changer in trunk/hatch

Introduction

This easy to install Bluetooth hands-free, streaming and charging kit is essential to keeping your classic as stock possible with up-to-date Bluetooth features. This module sounds great for mobile conversations, streaming music and more.

The NEW! wireless remote is used to pause, play, next/previous tracks, answer/end calls and switch sources and is easily mounted to dashboard areas with double side tape. In addition, the built-in USB port provides 5V/2.1A current to charge those power-hungry devices while on the road.

Keep original radio and CD changer while enjoying Bluetooth features only available in newer cars.

Note: The BTA-JAG98 does not interfere with functionality of existing AM/FM/radio, CD changer, GPS navigation. A functioning 6-disc auto changer is required.

See **Frequently Asked question** at the end of this guide for more details.

Installation

1. For XJ: Remove carpet trim piece surrounding audio rack (See **Fig. 1**). If navigation is missing (**Fig. 1A**); use open space to access the auto CD changer connecting plug, but if vehicle has navigation (**Fig. 1**), accessing the auto CD changer plug will require unlocking the "inner frame":

Remove (2) 7mm bolts on right and left side (See **Fig. 1A, 1B**)

Remove (2) 7mm bolts from top (See **Fig. 1A, 1B**)



Fig. 1



Fig. 1A



Fig. 1B

2. Pull inner frame out.
3. On CD changer, locate short black pigtail cable (it's the only cable on CD changer) See Fig. 2

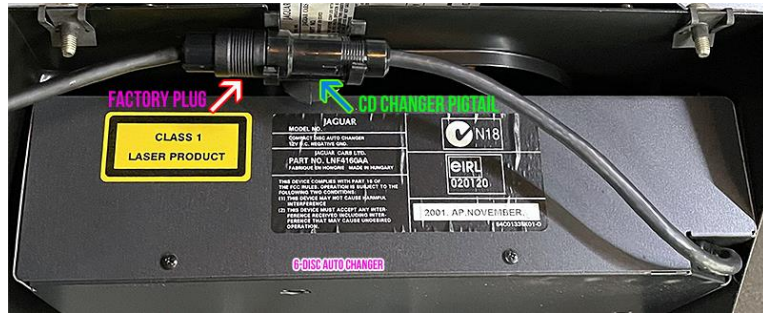


Fig. 2

4. Remove cable from holding tab (See Fig. 2), and disconnect by pulling apart **(do not twist)**
5. Once disconnected; female (Seen on the right) leads to changer and male plug (left) leads to amplifier or radio - (See Fig. 3)



Fig. 3

6. Connect factory male plug (left in Fig.3) to female connector on install harness (Fig. 4). Hold one cable in each hand, align markers (triangle) on both and push inward. **(Do not twist to connect).**



Fig. 4

7. Connect 90-degree male plug (See Fig. 4a) to CD changer female socket (See Fig. 3/4)

Warning: The right-angle male plug on install harness (See Fig. 5) does not have an alignment marker; Use imaginary marker (triangle) shown in Fig. 4, align with market on female connector from CD auto changer (See Fig. 4) and push inward (do not twist)



Fig. 5

Noteworthy:

There are multiple Ai-Net type plugs/sockets connections between audio rack components and more so in vehicles with premium sound (e.g., Amplifier, Navigation, etc.). In premium audio systems, install harness connects between CD changer and amplifier and in standard systems (no amplifier) between CD changer and radio.

To minimize connecting errors, locate single black pigtail on the CD auto changer – (See Fig.4) **Connecting install harness to something other than CD auto changer will result in low or no audio playback, no power to radio etc.**

8. Route 6-pin plug from install harness toward center console (armrest/center glovebox) area.

Routing installation cable (Sedan)

1. Use pry tool to open gap between window pillar and rear deck as seen in **Fig. 7**. From inside trunk fish audio plug (See **Fig. 6**) through gap and into the cabin. (See **Fig. 7**)

Fig. 6



Fig. 7

2. Pull excess cable and tuck (hide) under backrest, seat cushion as you work towards the rear of the center glove box (armrest) See **Fig. 8**



Fig. 8

3. Continue fishing installation harness under center glove box and into storage bin.
4. **To remove storage bin:** Open the center glove box and remove 2 Philips head screws from latch cover and two more from hinge then remove the single screw on retainer bracket.
5. Lift to remove storage bin and set aside.
6. Locate installation harness 8-pin female fed through in step 3 and **gently pull excess cable.**

Note: The aforementioned steps apply to sedan (XJ etc.) X100 (convertibles) requires additional steps not part of this guide.

Module installation

Install Bluetooth module in center armrest/glovebox. (Fig. 9). This area is also home to factory phone plug (See Fig. 10) and cigar lighter supply. Tap into either to power module (see Fig. 10).



Fig. 9



Fig. 10

1. Connect installation harness 6-pin plug to 6-pin connector routed from trunk/hatch See in Fig. 6.
2. Connect installation harness 16-pin plug (See Fig. 10) to module 16-pin connector (See Fig.11)



Fig. 11

3. Tap installation harness **red wire** to 12V accessory switched supply (**Do not connect to battery supply**)
 May we suggest tapping into factory phone plug (if equipped).
 The factory phone plug is located under center armrest, use chart below to locate accessory wire on said connector/plug. **Always test voltage prior to finalizing.**

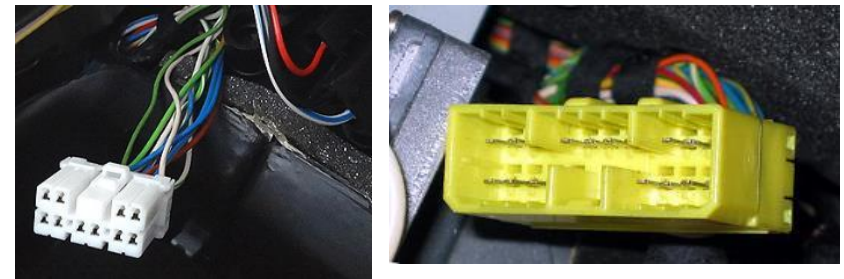


Fig.12

Factory connector/Plug	ACC pin/wire color	Ground wire
10-pin Female (white)	Pin 10 (light green)	Pin 6 (black)
10-pin Male (yellow)	Pin 10 (white/green)	Pin 6 (black)
14-pin (yellow)	Pin 13 (Green)	Pin 11 (black)
18-pin male (yellow)	Pin 5 (Green)	Pin 11 (black)

4. If vehicle does not have a phone plug; connect accessory wire to cigar lighter supply lead under console:
Cigar lighter white/blue wire is 12V switched.
Note: Cigar lighter supply may introduce noise into the system especially if used to supply power to a USB charging device, in which case consider an alternate (we recommend factory phone plug). If engine noise is still an issue, consider adding a [noise filter](#) or similar.

Playback options explained

These are the options available at checkout:

1. Retain changer playback (**default**)
2. Auxiliary input (instead of changer playback)

1. Retain changer playback:

Default option allows users to retain use of the 6-disc CD auto changer.

Proceed to installation step 3 below.

2. AUX input (instead of CD playback):

Instead of being able to play CD's (from 12-disc changer); this option provides an aux input jack to which users connect and play portable audio devices (e.g., sat radio, Alexa, iPod, Mp3 etc.)

Warning: Aux input option replaces CD playback; however, the **CD changer remains connected and at least 1 disc must remain in magazine**

The aux jack may remain freestanding or custom install to dash or panel. To custom install:

1. Drill a ¼ inch hole to dashboard or panel
2. Insert aux jack through hole and secure with nut. (See Fig. 13)



Fig. 13

3. Connect one end of included 3.5mm audio cable (See Fig. 14) to "AUX" jack and connect the other end to audio device (within 3 ft.)
4. **Proceed to installation step 5**



Fig. 14

5. Attach microphone and bracket mounting bracket to headliner, sun visor etc.
6. Route microphone cable down pillar, under dashboard and into center armrest where module is installed.
7. Connect microphone right angle plug to module "MIC" input. (See Fig. 15)
Wind noise will negatively affect phone audio. Users are advised to install microphone away from wind/ventilation ducts etc.



Visor microphone



Fig. 15

Optional USB extension cable installation

Note: 1. Optional 6 ft. USB dash mount extension cable is not required for operation, however it extends USB charging port (See **Fig. 18**) to dashboard, glovebox etc.

2. **The USB port supports charging only**

1. Drill a $\frac{3}{4}$ " hole to dash or panel using a step drill bit or equivalent (See **Fig. 16**)
As an alternative; use the included bracket (See **Fig. 14**) to mount USB without drilling.



Fig. 16

2. Fish USB cable terminal (See **Fig. 17** through hole created in step 1 and plug into USB port on module (See **Fig. 18**)



Fig. 17
USB cable



Fig. 18

3. Snap header (See **Fig. 19**) to surface until flush (See **Fig. 20**)



Fig. 19



Fig. 20



Fig. 21

Tuck and secure any extra wires from moving parts and proceed to next step

Pairing module

Pairing varies among devices but basic steps are the same. This process is done upon initial install and will not have to be repeated

1. Turn ignition and radio "ON"
From your Bluetooth enabled device, turn the Bluetooth ON and search for Bluetooth devices.
2. When a list of available Bluetooth devices appears on your Bluetooth device, select "DisCarSt" (See Fig. 22)
3. Confirmation "tone" is heard on car speakers.
4. The unit will automatically enter the BT Audio source and you can now start streaming audio from your Bluetooth enabled device.
Note: If the mobile phone doesn't support SSP (Simple Secure Pairing) Profile, please enter the pass code of "0000"

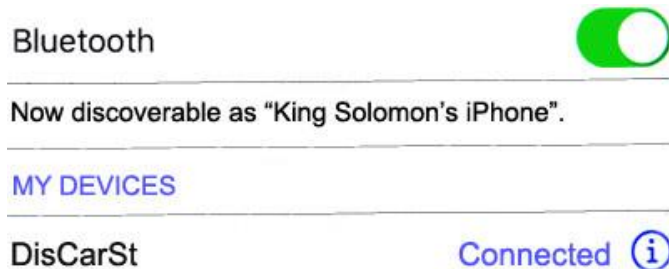


Fig. 22

Feature comparison chart

Feature	JAG-HF	JAGCD-HF	BT45-JAG	BTH-JAG98	AZDIY-JAG98R
CD changer retention	X	✓	X	✓	✓
Audio input (aux)	✓	✓*	X	Optional	Optional
Charging (USB)	✓	✓	X	✓	Optional
Mutes (all radio modes)	X	X	✓	X	X
Visor microphone	X	X	✓	✓	✓
Requires CD changer	✓	✓	✓	✓	✓
Voice Recognition	✓	✓	✓	X**	X**
Requires phone plug	X	X	✓	X	X
Plug-n-play installation	X	X	✓	X	X
Remote control	²	²	✓	✓	✓
Module installs:	Armrest	Armrest	Armrest	Armrest	behind radio

*Aux input instead of CD changer

** activate VR on audio device as customary

² optional [remote](#)

Bluetooth operation

1. Turn ignition to "ACC" or "ON"
2. Turn radio ON.
3. Press "CD" button on radio to switch to Bluetooth mode
 1. Launch smartphone music streaming application
 2. Use remote control (See Fig. 22) or device built-in controls or touch screen to for track selection, adjust volume, pause/play etc.
3. Place phone call or ask someone to call. To answer call; press **Previous track** on remote control.
4. To end call press **Next track** remote control.
5. To switch to CD changer press; **Pause/Play** button
6. To switch back to streaming; press **Pause/Play** button
7. If correct operation is confirmed go ahead and reinstall radio.



Fig. 22

3. If correct operation is confirmed go ahead and reinstall radio.

Warning: Playlist/Track selection *NOT* possible from Jaguar radio buttons. Use audio device built-in controls or included remote to access and control audio files. Muting works only when radio is in "CD/Bluetooth" mode. If in AM/FM mode, radio does not mute upon initiating or receiving calls.

Frequent ask questions & troubleshooting

1. **What is the difference between the BTH-JAG98 and BTH-JAG98R?**
The BTH-JAG98R connects to the radio and applicable to standard audio system in 1997*-99 XK and XJ and 2000-06 XK and 2000-03 XJ. The BTH-JAG98 works in same vehicle but with Premium Audio systems.
Note: 2000+ vehicles with Premium Audio system (amplifier in trunk— See Fig. 23) require our BTH-JAG98. To be clear, 2000-03 XJ and 2000-06 XK premium audio (amplifier in trunk) requires the BTH-JAG98.



Fig. 23

2. **Can I pair more than one device to Bluetooth module?**
YES; pairing multiple devices is possible, however only one device can connect at a time. Disconnect first device to allow pairing to another device.
3. **Will I be able to use both music and Navigation apps at the same time?**
YES! When streaming and Navigating (e.g., Waze etc.); music will mute during navigation guidance and return to previous state when guidance ends. If a call is made or received, both Navigation guidance and streaming are muted until call is ended.
4. **After installing and testing the system everything works, but there is engine "whine". (Increases with RPM) What can I do to fix this?**
Ensure all connections are snug.
If powering module with cigar lighter: remove any charging (e.g., USB) device from cigar lighter port.

Relocate accessory wire (see phone plug chart on page 5)

Install suitable [noise filter](#).

5. **How do I listen to the CD changer or AUX device?**
To listen to CD's or AUX, press **play/pause** button on remote or from audio device.
6. **Can I connect the BTH-JAG98 to the back of the radio?**
NO; the BTH-JAG98 harness plugs into the CD changer plug in luggage compartment or hatch and the module installs beneath armrest.
7. **What is the vehicle application and where does audio module connect?**
The BTH-JAG98 is specific to the following Jaguar vehicles:
1997*-03 (x308) (To CD changer plug in luggage compartment)
1997*-06 (x100) (To CD changer plug in luggage compartment)
8. **I hear clicking sounds as I use my device, how can I stop this?**
Go to device settings and disable touch sounds.
9. **My module does not always pair when entering vehicle. How to I remedy this?**
Module may not pair if already paired to another device (last connected device). Should this happen, check that no other device has already paired, turn ignition off and back on or disable/re-enable Bluetooth on device.
10. **Playback is distorted, how do I fix this?**
One likely cause for distorted playback is high volume setting on audio device. To fix, turn radio volume up to comfortable level, then lower volume on device until it no longer distorts.
11. **Callers can hear me, but I can't hear them- why?**
One likely reason is the Smartphone call volume is set too low. Please raise call volume level on your device to comfortable level.
12. **Does this kit mute the radio (AM/FM) when calls are made or received?**
NO. This module does not mute the speakers if radio is in AM/FM mode. When phone rings, press "CD" button on radio to switch to Bluetooth mode. Your smart device will mute speakers if radio is in "CD" mode (Bluetooth mode).
13. **Does it integrate to the steering control or does it have a separate pad?**
Steering wheel controls do not apply. Use included remote to control select Bluetooth functions (skip, answer/reject calls, volume etc.)
14. **Do I need to connect a microphone or does it is integrated to the factory installed microphone?**
The included microphone must be installed. Optional wire harness may be available to allow use of the factory mic. See product page for details.

15. **Does call number, song name etc. show on the display?**
NO. Radio does not display callers name, number or song text.
16. **Only one Plays only on one side-plays, radio does not responding to "CD" button, no power. What could be causing these issues?**
 - Check that factory CD plug (See **Fig. 4**) is snug to our connector (Refer to page 3-4).
 - Inspect the harness female connector pins. These may need "adjusting" The pin on factory male plug over time/temperature changes may become rigid no longer "flex. The contact pins in the male plug may develop a "memory position" if it has never been disconnected.**To remedy the no power or "CD" button not responding:**
Get the largest flat head screwdriver or object (1/4"/25mm) you can fit into the connector and flex (push) the "U" shaped pin holder tab upward or as seen in **Fig. 17**. **You may have to repeat this step.**
To remedy the no sound on one of all sides:
Repeat the aforementioned and flex (push) the flat (top) pin holder downwards.
Flexing pin holders downwards allows for the pins to move closer to those on factory plug (which have become rigid and are no longer flexing up)
This is a one-time adjustment that will not have to be repeated:



Fig. 24

17. I'm experimenting annoying engine noise (alternator whine that increases with engine speed) Is there a fix for this?

We recommend installing our in-line BT63-NF (See **Fig. 19**) noise filter. This plug-n-play noise filter fits between the radio harness and module. [Click here](#) to purchase.



*Late 1997 with Ai-NET CD plug only. Early 1997 with 8-pin DIN plug do not apply.

Disclaimer

- This product has no affiliation with Jaguar
- We're not liable for misuse of this product.
- Professional installation recommended

For help email support@discountcarstereo.com

© 1995-Nov-24 Discount Car Stereo, Inc. All rights reserved. Information in this document is subject to change without notice. Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.