

Courtesy of: DiscountCarStereo.com
Serving the internet community since 1995



CHRYO2-AUX

QUICK START INSTALLATION GUIDE FOR 2002-07 CHRYSLER CD CHANGER READY RADIOS

created August 10, 2015

Revised: August 22, 2021

PRODUCT SAFETY & DISCLAIMER

READ ALL INSTRUCTIONS CAREFULLY BEFORE INSTALLING, FAILURE TO DO SO MAY CAUSE PERSONAL INJURY OR DAMAGE TO PRODUCT AND/OR PROPERTY

- This installation guide is provided as a GENERAL installation guide, some vehicles vary and may require additional steps. We do not accept responsibility for third party labor charges or modifications. Exercise due-diligence when installing this product.
- We do not accept any responsibility for vehicle damage or personal injury resulting from the installation of this product.
- Careless installation and operation can result in equipment damage.
- Careless installation and operation can result in equipment damage.

Requirements:

RADIO WITH CD CHANGER CONTROLS- MODE BUTTON

Introduction:

Many older vehicle owner's adamant about keeping the factory radio will be pleased to know that adding this adapter makes it possible to connect and play may potable audio devices without sacrificing the original radio. The CHRY02-AUX auxiliary input adapter connects to the radio 10-pin CD changer/Sat radio port which guarantees to best possible sound. **Factory CD changer or Sirius radio (if present), must be disconnected and will no longer play.**

Compatible Chrysler radios must have a **MODE + DISC ^ on preset 1** and **DISC v on preset 5** (See Fig. 6) and 10-pin port (See Fig.2). Please ensure your radio meets all requirement prior to ordering.

See Frequently Asked question at the end of this guide for details.

Installation:

Radio removal required to gain access to connectors.

Vehicle specific radio removal is not part of this guide; but may be available upon request. With radio out;

1. If present, disconnect any factory option connected to radio 10-pin port
2. Connect 10-pin gray plug (See Fig. 1) from adapter harness to 10-pin connector on radio (See Fig. 2)



Fig. 1
10-pin plug

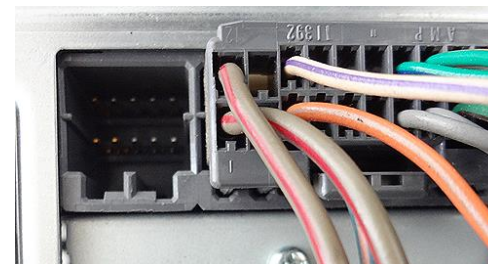


Fig. 2
Radio connector

3. Connect one end of supplied 3.5mm audio cable (See Fig. 3) to input jack on adapter (See Fig. 4).
4. Route audio cable plug to dashboard or wherever audio device will reside (within 3 ft.)



Fig. 3
3 ft. audio cable



Fig. 4
3.5mm jack

5. Secure adapter and proceed to next step.

Operation:

1. Turn ignition and radio "ON"
2. Press radio "MODE" button until "CD" display mode (See Fig. 5)



Fig 5

Chrysler rounded face radio with Mode button

3. Turn radio volume control button to set playback level.
4. If correct operation is confirmed go ahead and reinstall Radio.

Frequent ask questions

1. **Does the CHRY02-AUX work on all Chrysler 10-pin radios?**
NO; Works on CD changer controlling radios with the following buttons:
MODE + DISC ^ on preset 1 and DISC v on preset 5 (See **Fig. 6**) and 10-pin CD port on the back (See **Fig. 2**)
Radios with "MODE" button only are **NOT** compatible.



Fig. 6

2. **My radio has a CD-C button. Will the CHRY02-AUX work?**
Radios with **CD-C** button (**Except European "RAD" - part number P56038585AD**) have 8-pin ports and requires our [CHRY98-AUX](#)
3. **My radio has a Mode button, will the CHRY02-AUX work?**
NO; Radios with "MODE" button only do not have CD changer controls and not compatible. Compatible radios must have buttons seen in **Fig. 6** above.
4. **Will I have to disconnect my Satellite radio or separate CD changer?**
YES, this adapter uses the 10-pin radio port. Any factory option already in place will need to be disconnected. See our [AUX-CH3](#)

Disclaimer

- This product has no affiliation with Chrysler
- We're not liable for misuse of this product.
- We recommend professional installation

email support@discountcarstereo.com

© 1995-Aug-21 Discount Car Stereo, Inc. All rights reserved. Information in this document is subject to change without notice. Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.