



IL-JAG

APPLE LIGHTNING ADAPTER QUICK START GUIDE FOR JAGUAR WITH CD CHANGER

Not for late model 1987 with Ai-NET plug

Created May 3, 2016

Revised May 26, 2023

PRODUCT SAFETY & DISCLAIMER

READ ALL INSTRUCTIONS CAREFULLY BEFORE INSTALLING, FAILURE TO DO SO MAY CAUSE PERSONAL INJURY OR DAMAGE TO PRODUCT AND/OR PROPERTY

- This installation guide is provided as a GENERAL installation guide, some vehicles vary and may require additional steps. We do not accept responsibility for third party labor charges or modifications. Exercise due-diligence when installing this product.
- We do not accept any responsibility for vehicle damage or personal injury resulting from the installation of this product.
- Careless installation and operation can result in equipment damage.

Requirement:

1998-06 Jaguar with functioning CD changer

Introduction:

Just because you drive an older car does not mean you have to settle for old technology. Apples new generation of products lightning connector allows the iL-JAG to update your car to **play and charge** these iOS products. Installing this product requires sacrificing CD changer playback, but with the storage capacity of these new devices sacrificing the CD changer playback should be an easy decision. See **Frequently Asked question** section at the end of this guide for more details.

Installation:

The iL-JAG connects to the radio behind the dash and because of that, radio removed is required to gain access to the connectors.

1. Disconnect the negative battery terminal (See Fig. 1)

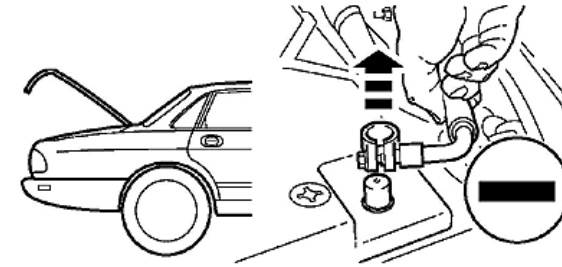


Fig. 1

2. Move "J" gate selector to position "D"
3. Using a panel removal tool, unclip and remove "J" gate finisher (See Fig. 2)

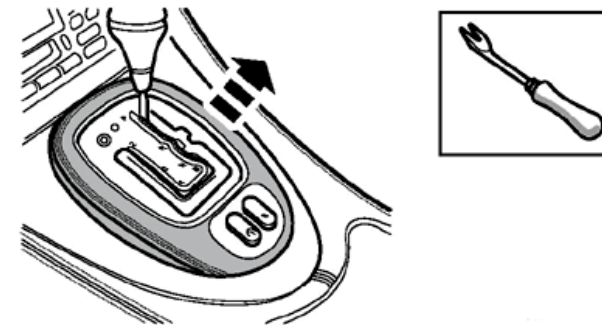


Fig. 2

4. Using a T30 torx head, remove "J" gate finisher plate (See Fig. 3)



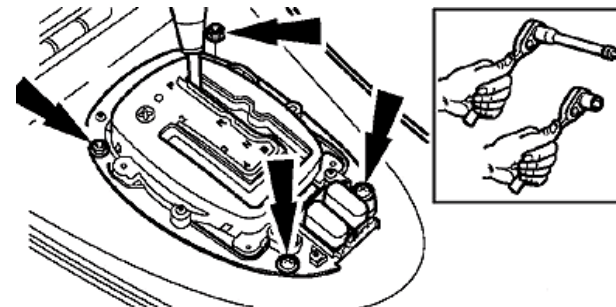


Fig. 3


5. Lift finisher plate upwards and disconnect electrical plugs (See Fig. 4)

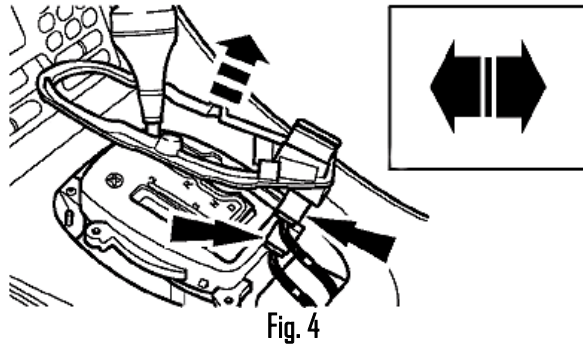


6. Remove center console veneer panel (See Fig. 5)

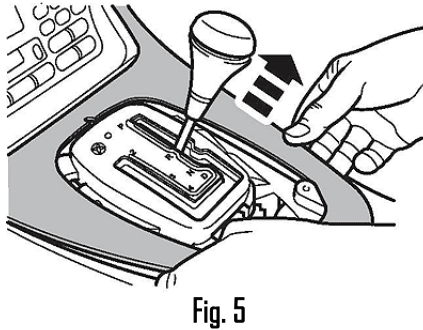


7. Remove (2) Philips head screws on LH and RH side of console (See Fig. 6)

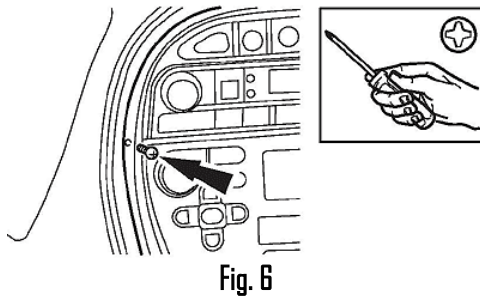

8. Lift radio over gear selector hub and remove from dash (See Fig. 7).

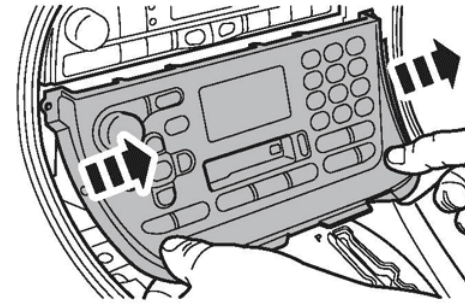

9. Disconnect CD Auto changer plug from radio as seen in Fig. 8

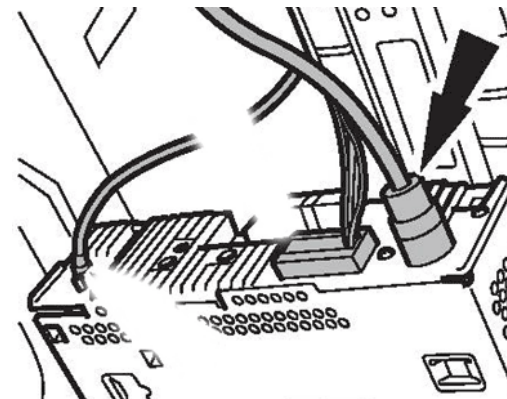

10. Connect CD auto changer plug to adapter female connector. (See Fig. 9)



Fig. 9
adapter

11. Connect adapter male plug (See Fig. 9) to radio port vacated in step 9.
12. Carefully route Lightning plug (See Fig. 10) to desired location on dashboard, glove box, console etc. within 5 ft. of radio. Use caution to not cut, pinch or crimp the cable during this step.



Fig. 10
Lightning plug

13. Install Lightning cable in a location away from heat, humidity, moving parts, or sharp metal objects. **Damage to lightning plug may occur if subject to abuse.**
- 14.

Operation:

1. Turn ignition to accessory position and radio ON.
2. Press "CD" button on radio.



Fig. 11

3. Connect iOS device to Lightning plug
4. iOS device will begin charging:
Note: On some devices, charging may not begin until unlocked
5. Select favorite track using iOS device built-in controls.

Warning! Playlist and Track selection is ***NOT*** possible from the radio. You must use the iPod built-in controls to access music files

6. Playback should now be heard on car speakers
7. Use radio volume control to set playback level
8. If successful go ahead and reinstall radio

Frequently asked questions:

1. Does the iL-JAG work in Premium Systems
The iL-JAG **does NOT work in 2000-Up Premium** Audio systems. It does work in 1998-99 x308 and x100 Premium Audio Systems or any without amplifier.
2. How do I know if my 2000-Up has premium audio?
They are several ways to know:
 - Remove driver side carpet panels to reveal audio rack. (See picture below).Amplifier will be mounted at the top.



- Vehicle has two subwoofers on rear deck (Sedan) or rear side panels (convertible).
3. Does the iL-JAG work without the CD changer?
NO. For this adapter to work vehicle must have a working changer.
 4. Will I have to disconnect the CD changer for the iL-JAG to work
The CD Auto changer remains connected but will no longer play.
 5. Can I install this adapter without removing the radio
NO; the iL-JAG connects to the back of the radio and because of that radio removal is required. **This adapter will not work if connected in trunk.**
 6. Do you have an adapter for 2000-Up Premium Audio System?
[See our iL-JAG98.](#)
 7. My adapter works great for music applications, but does not play phone audio. Is this normal?
Yes, the iL-JAG support audio playback from applications but does not support phone audio.

8. In what model/years Jaguar will this adapter work and where does it connect?

The iL-JAG works in the following Jaguars:

1998-99 x308 Premium or Standard (Connects to Radio)

1998-99 x100 Premium or Standard (Connect to Radio)

2000-03 x308 Standard (Connects to Radio)

2000-06 x100 Standard (Connects to Radio)

***2000-Up x308 & x100 with Premium Systems are NOT compatible. See our iL-JAG98**

Disclaimer

- This product has no affiliation with Jaguar or Apple
- There are no warranties expressed or implied by installing this product
- We're not liable for misuse of this product.

Email support@discountcarstereo.com

© 1995-May-23 Discount Car Stereo, Inc. All rights reserved. Information in this document is subject to change without notice. Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.