

USA·SPECMODEL: **SVG - 707**
AUX INTERFACE**OWNER'S MANUAL**THANK YOU FOR PURCHASING **USA·SPEC** PRODUCT. BEFORE OPERATION, PLEASE READ THESE INSTRUCTIONS.

The SVG-707 is designed to interface with and control the audio output of an aftermarket video or audio system through GM radio's AUX port.

PACKAGE**USA·SPEC** SVG-707 package contains the following:

- SVG-707 Interface Box
- Wired multiple 24pin and 12pin connectors (part # CAS-G7i)
- 4' shield cable for connecting GM radio and SVG-707 (part # CAS-F12)
- 12 Volt Accessory Power connector with red and black wire
- Choke filter box
- Mounting Screws X4

APPLICATIONS

- | | | |
|----------------|--|------------------|
| • CADILLAC | : ESCALADE, EXT | Model Year 03-05 |
| • CHEVY TRUCKS | : AVALANCHE, SILVERADO, SUBURBAN, TAHOE, TRAILBLAZER | Model Year 03-05 |
| • GMC | : DENALI, SIERRA, YUKON, ENVOY | Model Year 03-05 |
| • HUMMER | : H2 | Model Year 03-05 |

Note: RADIO MUST HAVE AUX/DISC AND BAND BUTTONS. WORKS WITH NAV SYSTEM.
The SVG-707 CANNOT BE SIMULTANEOUSLY CONNECTED TO THE RADIO WITH A FACTORY INSTALLED DVD PLAYER SYSTEM.

INSTALLATION

Step1. Remove factory radio.


Step2. Unplug the 24pin and 12pin connectors from the radio and connect them to **USA·SPEC** CAS-G7i cable.Step3. Plug in the **USA·SPEC** CAS-G7i cable's 24pin plug and 12pin plug to the radio.

Step4. Plug the round din plug of CAS-F12 to SVG-707.

Step5. Connect CAS-F12 cable to CAS-G7i cable.

Step6. Plug the audio output of DVD player or other audio source to the RCA audio input jack of SVG-707.

As soon as these steps are completed, the radio should display the text "DVD" in small print.

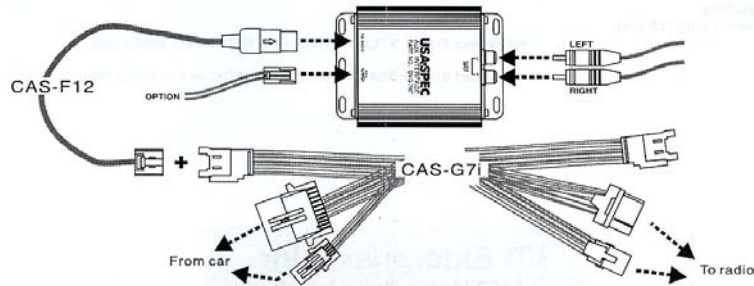**OPERATION**

To access the audio output from a DVD player or other audio source being connected to **USA·SPEC** SVG-707 box, push the AUX or DISC button on GM factory radio. The radio will display "RSE" and the audio should now be heard through the factory audio amplifier system. Control VOLUME, BASS, TREBLE, etc, as you would normally do for other program sources on the radio.


OPTION**USA·SPEC** SVG-707 provides a 12Volt Accessory Power Output.

It is optional to use the 12Volt power output of SVG-707 to power a DVD player or other instruments

- The 12Volt Accessory Power Output's maximum current drain is 1.5ADC.

APPLICATION NOTE:

- To achieve low noise performance for your in-car video system, it's highly recommended to insert a choke filter to the B+ power line and the ground wire on **USASPEC CAS-G7i** cable. See diagram below for reference.
- A choke filter should be added to the B+ of the DVD player and video monitor as well.

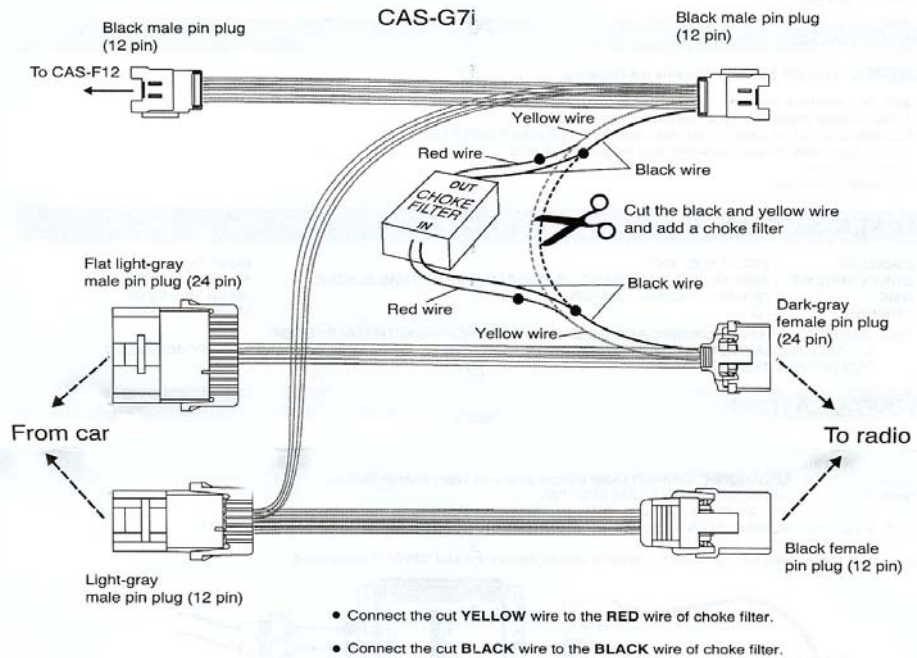

Revised February 12, 2007

USASpec Inc a division of LTI Enterprises, Inc Design and specifications are subject to change without notice.

© 1995-07 Discount Car Stereo, Inc. All rights reserved. Information in this document is subject to change without notice. Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.